



## Electric transfer pump for oil / AdBlue®



Part no  
53725, 53727, 55525, 55526

## Electric transfer pump for oil / AdBlue®

- **Centrifugal pump for transferring oil or AdBlue®**
- **230 V AC or 24 V DC**
- **Complete kit with accessories for easy start-up**
- **Fits containers 208 - 1000 l**

### Description

Our electric pump is a centrifugal pump that has been designed and manufactured for transferring liquid from drums and tanks.

The pump has a 2" BSP connection and can be easily installed or removed thanks to a quick coupling system. The pump can be rotated in ten different positions. The side handle acts as a cable holder and the nozzle holder keeps the hose within reach and off the floor.

### Features

#### Anti-siphon valve

The pump has a valve designed to prevent siphoning of liquid from the drum to if the hose falls below the liquid level.

#### Safety

The pump has a motor with a double-insulated casing, which makes the pump robust and durable. In addition, the double insulation allows water and emulsion to be transferred in a completely safe way. The pump has IPX4 (splash water protection) and CE marking.


#### Complete kit

The electric pump is delivered in a complete kit: ready to use. The kit consists of a telescopic suction pipe with filter (adjustable from 330 to 970 mm high), discharge hose, manual nozzle and 2/3 metre power cable. The pump has a built-in barrel connection with G2" thread.

## Technical data

PART NO	53725	53727	55525	55526
Fluid	Diesel, mineral and synthetic oil engine oil, glycol (antifreeze), kerosene, water emulsions etc.			AdBlue® / DEF
Voltage	230V AC	24V DC	230V AC	24V DC
Motor	224 W	135 W	224 W	135 W
Power consumption	0,97 A	5,6 A	0,97 A	5,6 A
Flow rate	40 l/min	35 l/min	40 l/min	35 l/min
Sound level	70 dB			
Cable length	2 m w/ Schuko plug	3 m	2 m w/ Schuko plug	3 m
Drum connection	BSP 2" (M / Utv)			
Suction tube	330 - 970 mm			
Operating temperature	-10°C + 40°C			
Material pump housing	POM / Acetal		PP / Polypropylene	
Material dispensing nozzle	POM / Acetal		PP / Polypropylene	
Material telescopic suction tube	PP / Polypropylene			
Material outlet hose	NBR Rubber			
Material metal parts	Stainless steel			

## Dimensions

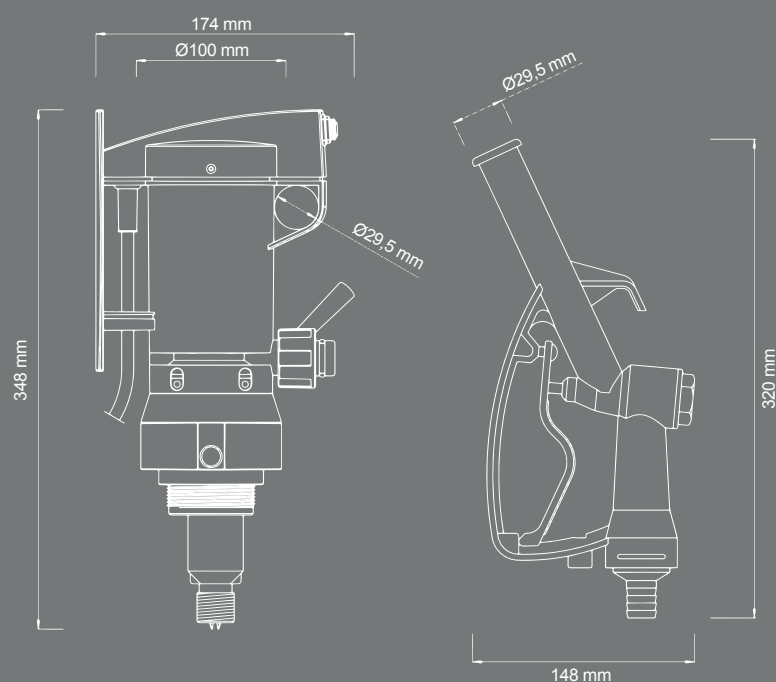

## Accessories



ART.NO. 28645  
Trolley for 180 kg / 208 l



ART.NO. 28391  
Heavy duty safety drum trolley, air wheels



ART.NO. 24759  
Digital turbine meter 1" (F) BSP

### READ MORE ON OUR WEBSITE

Follow the link with your mobile phone or visit [www.alentec.com](http://www.alentec.com) to read more about our products or contact us with your enquiry.



**Alentec & Orion AB**  
Grustagsvägen 4  
SE-138 40 Älta  
Sweden  
Tel: +46 8 747 67 00  
Fax: +46 8 715 20 74  
E-mail: [info@alentec.se](mailto:info@alentec.se)  
[www.alentec.com](http://www.alentec.com)

**Alentec Orion Ltd**  
Barrs Fold Road  
Wingates Industrial Park  
Westhoughton  
BL5 3XP  
United Kingdom  
Tel: +44 116 284 60 40  
Fax: +44 116 284 60 70  
E-mail: [lube@alentec-orion.co.uk](mailto:lube@alentec-orion.co.uk)  
[www.alentec-orion.co.uk](http://www.alentec-orion.co.uk)

**Orion Lube System nv/sa**  
Eksaardse Rijweg 236  
9041 Oostakker  
Belgium  
Tel: +32 9 250 94 60  
Fax: +32 9 250 94 69  
E-mail: [info@orion-lube.be](mailto:info@orion-lube.be)  
[www.orion-lube.be](http://www.orion-lube.be)

**Autolube Orion, S.A.S.**  
64, Rue du Puits Charles  
58400 La Charité Sur Loire  
France  
Tel.: +33 3 86 60 47 75  
Fax: +33 2 34 09 01 35  
E-mail: [info@autolubeorion.com](mailto:info@autolubeorion.com)  
[www.autolubeorion.com](http://www.autolubeorion.com)